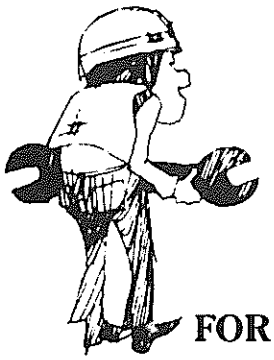

HODAKA SALES SERVICE

Service Bulletin

FOR INCLUSION IN HODAKA DEALER GUIDE

NUMBER: HSB–21 DATE: 3/24/76

SUBJECT: Ignition Timing Specifications

MODEL: All Models

The following table of ignition timing specifications for all HODAKA motorcycles was put together for the convenience of HODAKA Dealers and mechanics. The specifications in this table are to supercede any previously published specifications.

MODEL	IGNITION TIMING BTDC (STD.)
Ace 90	2.9mm (0.114")
Ace 100 (92)	2.9mm (0.114")
Super Rat (93)	2.9mm (0.114")
100-B (92A)	2.9mm (0.114")
100-B+ (92B)	2.9mm (0.114")
Wombat (94)	2.4mm (0.094")
Combat (95)	2.4mm (0.094")
Dirt Squirt (92C)	2.9mm (0.114")
Wombat (94A)	2.4mm (0.094")
Super Combat (97)	2.5mm (0.098")
Super Rat (98)	2.5mm (0.098")
Road Toad (99)	2.4mm (0.094")
Dirt Squirt (92C/01)	2.4mm (0.094")
250/ED (71)	1.1mm (0.043")